


SERIE VP - VALVOLA UNIDIREZIONALE (OTTURATORE A PISTONE)

VP SERIES - UNIDIRECTIONAL VALVE (PISTON SHUTTER)

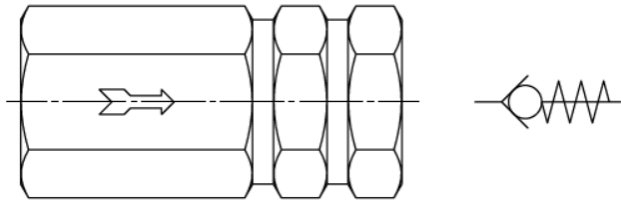

DESCRIZIONE / DESCRIPTION

Valvola di non ritorno unidirezionale con otturatore a pistone.
Unidirectional valve with piston shutter.

FUNZIONAMENTO / FUNCTION

Il fluido passa nella direzione della freccia e non ritorna indietro.
The fluid pass in the direction of the arrow and cannot return back.

DIREZIONE DI FLUSSO / DIRECTION OF THE FLOW

Come indicato dalla freccia.
As indicated by the arrow.

IMPIEGO / USE

Aria compressa – Aria compressa lubrificata – Gas vari –
Liquidi in genere.
*Compressed air – Lubricated compressed air – Various
gasses – Various liquids.*

MATERIALI / MATERIALS

Corpo / Body : Ottone CW614N Nichelato / Brass Nickel
Rondella / Washer : Ottone CW614N / Brass
Pistone / Piston : Ottone CW614N / Brass
O-Ring / O-Ring : NBR (on request FKM)
Molla / Spring : Acciaio Inox AISI 302 / Stainless steel
AISI 302

FINITURA ESTERNA / FINISH

Nichelata.
Nickel plated.

MISURE / SIZES

1/8" – 1/4" – 3/8" – 1/2"

ESTREMITÀ / EXTREMITY

Con filetti / With threads G – GA ISO 228

(Rp – R ISO 7 – NPT a richiesta / on request)

FORMA / SHARE

Femmina – Femmina / Female – Female
Maschio – Femmina / Male – Female

PRESSIONE DI ESERCIZIO / WORKING PRESSURE

(Vedi tabella A / See table A)

TEMPERATURE DI ESERCIZIO / WORKING TEMPERATURE

(Vedi tabella A / See table A)

TABELLA A / TABLE A

PRESSIONE DI ESERCIZIO Min. – Max. <i>Working pressure</i>	PRESSIONE MAX DI APERTURA <i>Opening pressure</i>	TEMPERATURA <i>Temperature</i>
0.5 – 10 bar 50 – 1000 kPa 7 – 145 PSI	0.07 bar 7 kPa 1 PSI	-20 °C + 80 °C



MVS
CO-SOURCING FOR QUALITY PRODUCTS